

Description

Centric butterfly valve plastomer lined for On/Off and control service for aggressive and corrosive fluids and high purity application

Product features

- Body construction B1 Wafer DN 32-600
B3 Lug DN 32-400
B4 U-section DN 450-900
- Face to face dimension according to ISO 5752/20, EN 558-1/20
- Top flange according to EN ISO 5211
- Max. working pressure 16 bar (DN32-150), 10 bar (DN200-300),
6 bar (DN350-700), 2,5 bar (DN750),
6 bar (DN800-900)
- Rating PN10, PN16, ANSI cl. 150
- Temperature range -20°C ÷ 200°C according to working
conditions, other temperatures on request
- Work's tests Porosity check of the liner and overmolded
disc according to DIN EN 60243-1. Test
certificates on request. Tightness test
according to EN 12266-1/P12 leakage
rate A.

The torque of each valve is registered.

The butterfly valves BIANCA meet the safety requirements of the pressure Equipments Directive 97/23/EC (PED) appendix 1 for fluids of the groups 1 and 2.

Butterfly valves BIANCA are suitable to be operated in safety related systems according to IEC 61508 / 61511, Safety Integrity Level SIL 2

Special versions of the Bianca valves may be used in explosive atmospheres.

See brochure BIANCA ATEX.

VDI 2440 as option


CE

SIL



ATEX


TA-Luft

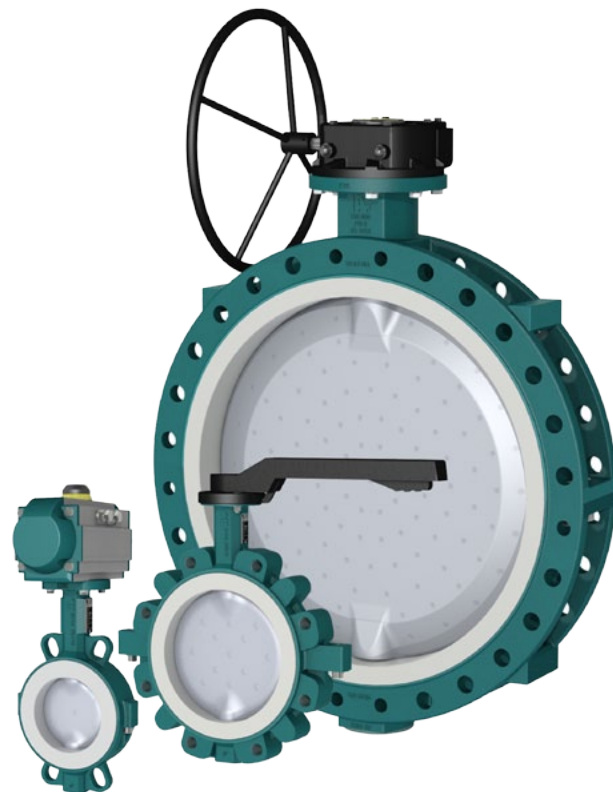

B1
Wafer





B3
Lug

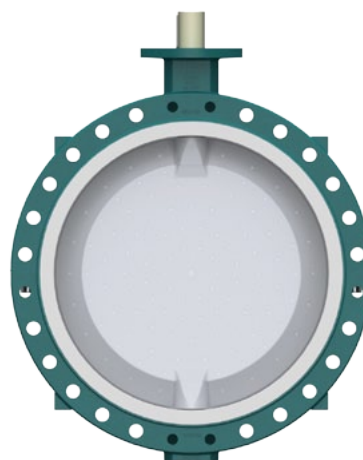

B4
U-section

Construction

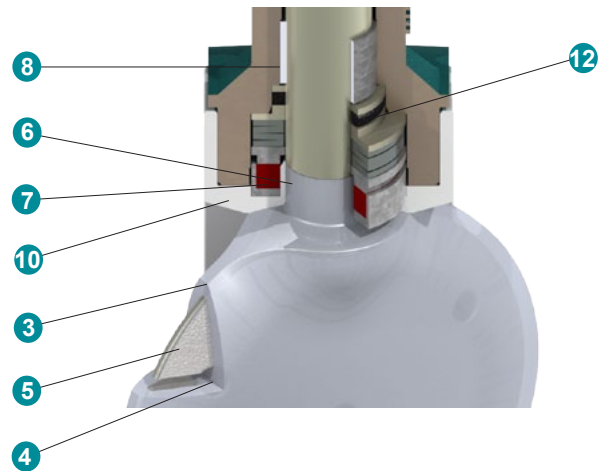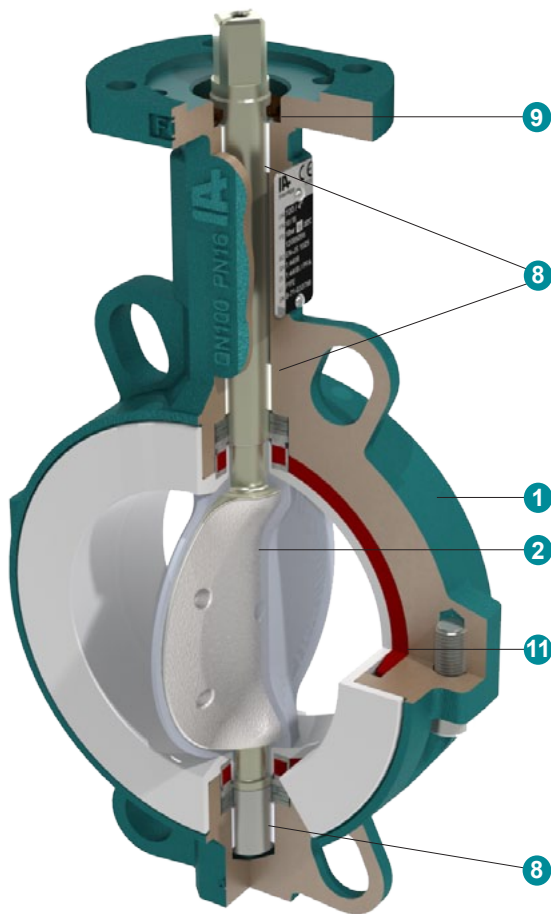

1	Two-piece body in GGG 40.3 / EN-GJS-400-18-LT
2	One-piece, blow out proof disc/shaft
3	Overmolding with a min. thickness of 3 mm
4	Overmolding is mechanically locked on the disc
5	Thin core, allows high k_v flow rate
6	Shaft overmolded in the shaft sealing area
7	Shaft sealing by prestressed safety packing
8	Self-lubricating shaft bushing
9	External shaft sealing
10	Chambered liner, prevents radial cold-flow
11	Elastomer back-up, immersed in body
12	TA-Luft VDI 2440 packing as option

BIANCA HP cleanroom production




Decontamination by ultrasonic cleaning



Material lock



Assembling, testing, packaging in clean room class 10'000



Tightness test with HP nitrogen

Torques with PTFE liner, security factor included


DN	32/40	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	750	800	900
Nm	35	42	42	59	75	90	157	270	375	510	675	900	1100	1300	1750	2100	2500	3100	4000

Kv values m³/h

DN	Opening angle of the valve							
	20°	30°	40°	50°	60°	70°	80°	90°
32/40	4	8	17	30	45	65	85	95
50	5	11	24	42	64	92	118	134
65	8	19	41	70	108	155	200	227
80	15	33	72	125	190	270	335	392
100	20	48	95	162	255	385	485	585
125	38	82	165	255	455	645	815	1015
150	60	130	235	395	645	955	1220	1495
200	95	230	465	795	1180	1815	2410	3050
250	175	350	710	1160	1610	2420	3650	4510
300	265	522	995	1720	2665	3965	5960	7210
350	350	660	1180	1800	2880	4550	7180	8760
400	510	985	1480	2450	4230	6550	9250	11350
450	665	1255	2230	3850	6250	9200	12250	14900
500	890	1620	2980	5350	8150	11800	15560	18000
600	970	2150	4180	7420	11350	16450	21200	24500
700	1060	2560	4868	8412	14359	23901	37638	48633
750	1217	2939	5588	9675	16484	27437	43207	55829
800	1402	3328	6351	11169	19073	32074	51820	63905
900	1915	4259	7897	13849	23887	41112	66771	81016

$$c_v = k_v \cdot 1,16$$

Pressure / temperature diagram

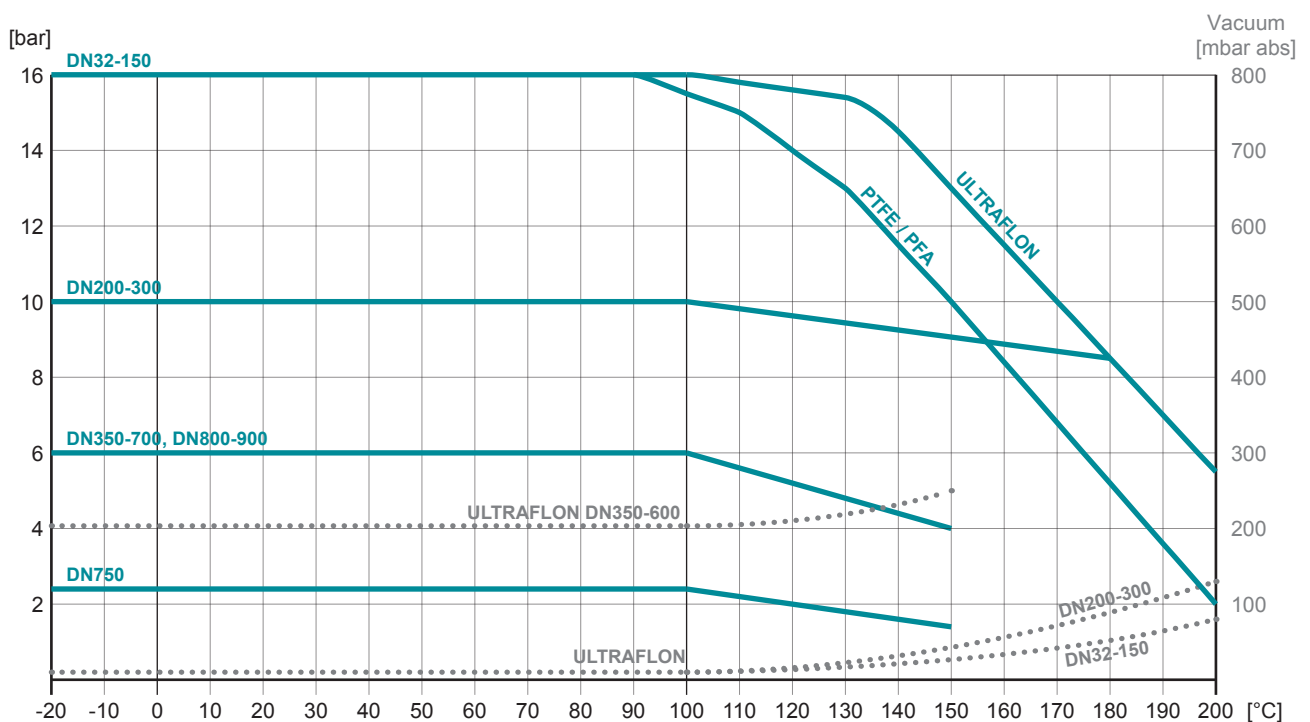


Please consult our technical department for higher temperatures.

Advantage of ULTRAFLON® liner

Permeation


Comparison of **ULTRAFLON®** - PTFE - PFA (film thickness 1mm)

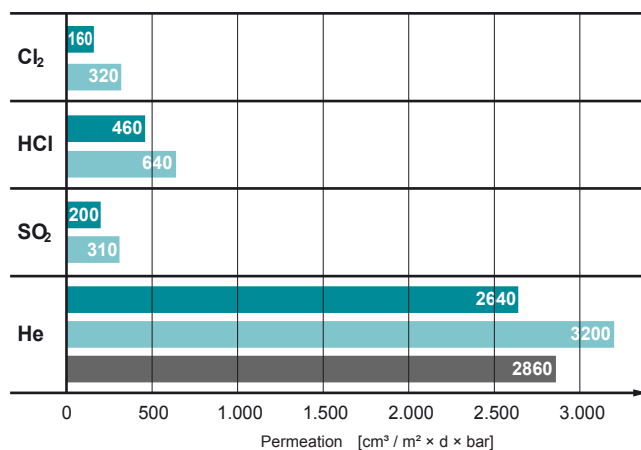



Deformation

under repeated load „Cold flow behavior“


Loading : 15 N/mm², 4 cycles
 Duration : 100 hours each cycle
 Temperature : 23°C (73°F)
 Perm. deformation after 24 hours recovery

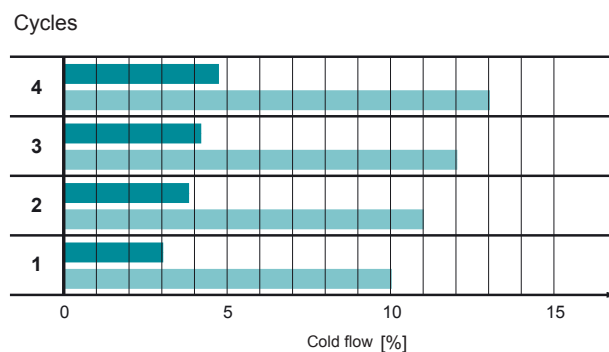

Endurance test (tightness)

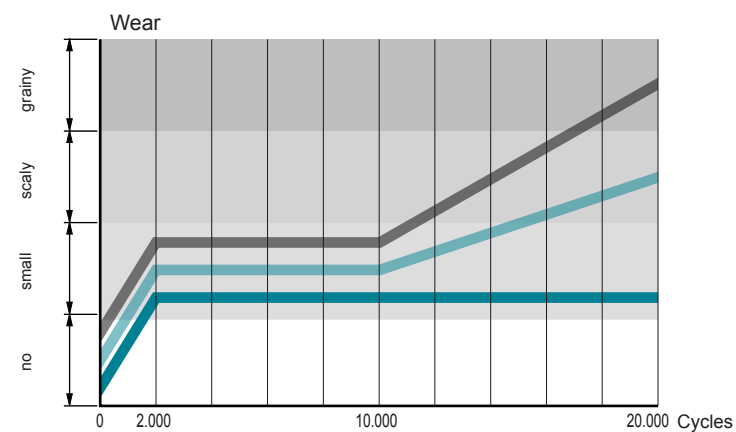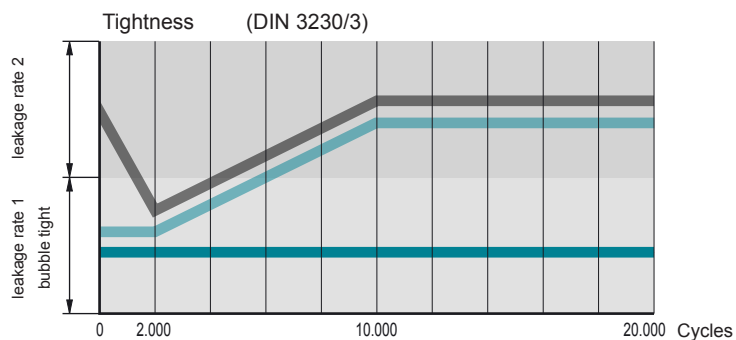

ULTRAFLON®
 PTFE
 PFA

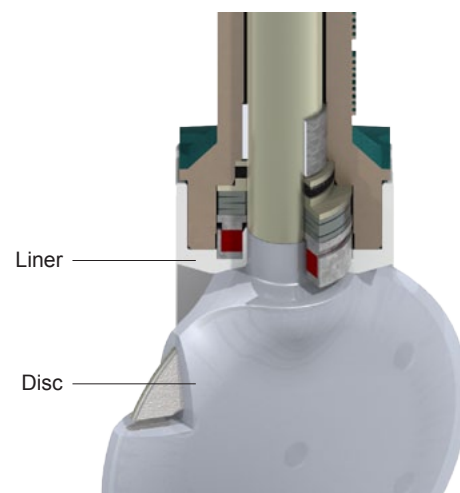

Type code

	B1	0100	3	3	2BE	4GT	TS	xx
	1	2	3	4	5	6	7	8
1 Body type	B1	Wafer						DN32-600
	B3	LUG body						DN32-400
	B4	U-section body						DN450-900
2 Nominal diameter	0032-0900	mm						
3 Working pressure	0	2,5 bar						DN750
	1	6 bar						DN350-700, DN800-900
	2	10 bar						DN200-300
	3	16 bar						DN32-150
4 Rating	**	PN10/16/ANSI B16.5 cl150 see table below						
5 Body	2BE	Ductile iron EN-JS 1025 (GGG40.3), Epoxy coated 80µ						
	3HE	Cast steel 1.0619, Epoxy coated 80µ						DN32-300 (on request)
	4B0	Stainless steel 1.4409						DN32-300
6 Disc-shaft, one piece	4G0	Stainless steel 1.4408						DN32-300
		Stainless steel 1.4404						DN350-900
	4GP	Stainless steel 1.4408 polished Ra < 0,8						DN32-300
		Stainless steel 1.4404 polished Ra < 0,8						DN350-900
	4GJ	Stainless steel 1.4435, Ferrite < 1%, e-polished Ra < 0,4						DN32-300
	4GT	Stainless steel PFA coated						DN32-300 (>300 on request)
	3BT	Disc carbon steel PFA coated, shaft stainless steel						DN350-900
	**A	PFA antistatic						
	4D0	Uranus 1.4539						(on request)
	7H0	Hastelloy 2.4602						(on request)
	7T0	Titan 3.7035, Gr2						(on request)
7 Liner / backup	TS	PTFE / MVQ						
	TE	PTFE / EPDM						
	TV	PTFE / FPM						
	**V	ULTRAFLON® (UF) for Vacuum or Chlorine applications						
	**A	PTFE or ULTRAFLON® antistatic						
8 Special execution	LF	without painting adhesion interfering substance						
	HP	High purity: The valve is cleaned, mounted, proofed and packed under cleanroom conditions. (US federal standard 209b, class 10000)						
	Ex	ATEX execution see brochure BIANCAATEX						
	180	TA-Luft VDI 2440						

Other executions on request !


**Rating (Code)

BIANCA		DN →	32	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600	700	750	800	900
	B1	PN10	3														2					
		PN16	3																			
		ANSI cl.150		3														A				
	B3	PN10	3										2									
		PN16	3										2									
		ANSI cl.150		A																		
	B4	PN10														2					2	
		PN16														3					3	
		ANSI cl.150														A						

When mounting the valve at the end of a line please note:

- Body type **B3, B4**
- Temperature 10 ÷ 30°C
- Medium only for non hazardous liquids
- Max. working pressure DN32-600 6 bar
> DN 600 on request
- no water hammer !!!

Dimensions

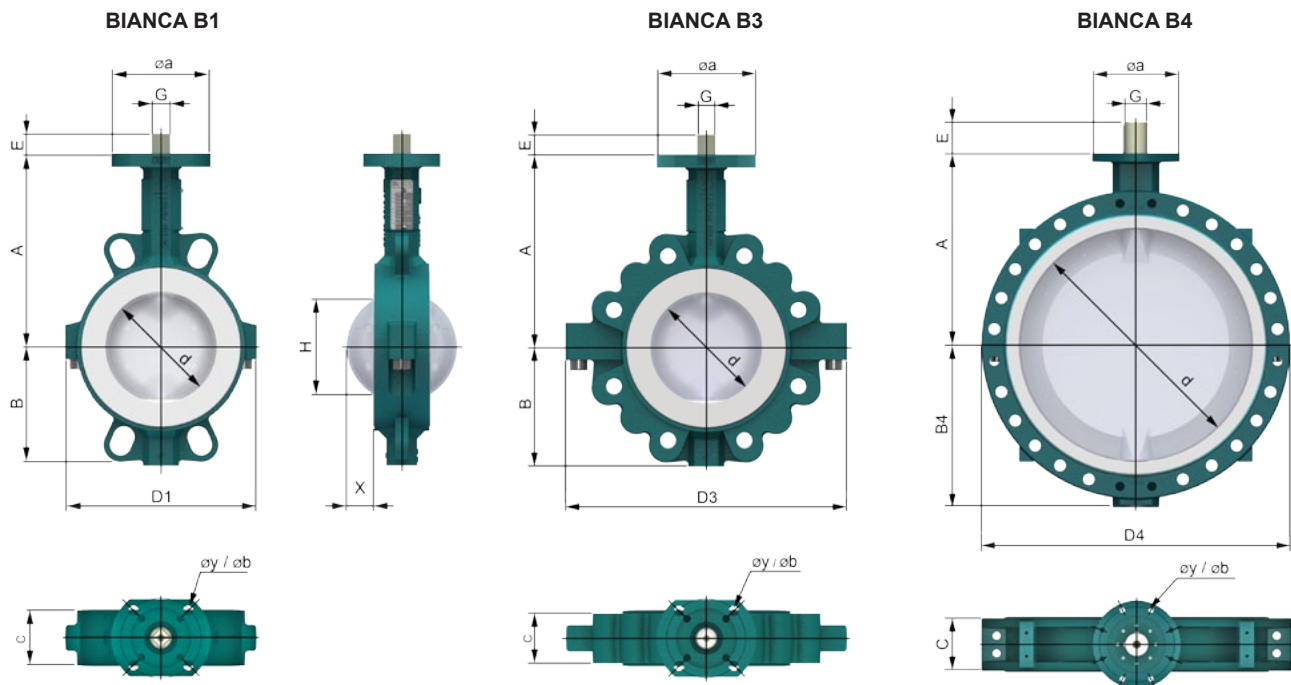



DN	d	A	B	B4	C	H	X	D1	D3	D4	ISO	a	y	b	G	E	B1[kg]	B3[kg]	B4[kg]
32/40	40	125	69	-	33	23	4	105.8	136	-	F05	65	4x7	50	11	19	1.7	2.4	-
50	50	134	68	-	43	42	9	118.4	162	-	F05	65	4x7	50	11	19	2.3	3.2	-
65	65	145	78	-	46	39	7	132.5	170	-	F05	65	4x7	50	11	19	2.9	4.1	-
80	80	160	92	-	46	66	17	144	216	-	F05	65	4x7	50	11	19	3.4	6.2	-
100	100	175	107	-	52	86	24	173	254	-	F05/07	90	4x7/9	50/70	14	19	5.1	9.3	-
125	125	194	120	-	56	112	35	219	293	-	F05/07	90	4x7/9	50/70	14	19	6.9	10.7	-
150	150	210	134	-	56	140	47	247	315	-	F07	90	4x9	70	17	25	10	12.9	-
200	200	239	162	-	60	191	70	295	389	-	F07/F10	125	4x9/11	70/102	17	25	14.1	22.3	-
250	250	275	199	-	68	241	91	367	483	-	F10	125	4x11	102	22	32	22.9	32.4	-
300	300	310	230	-	78	290	111	419	543	-	F10	125	4x11	102	22	32	32.9	46.9	-
350	339	349	254	-	78	330	131	428	564	-	F12	155	4x 13.5	125	27	40	50	87	-
400	400	379	287	-	102	387	149	473	620	-	F12	155	4x 13.5	125	27	42	68	98	-
450	450	426	320	320	114	436	168	528	-	630	F14	175	4x 18	140	Ø45	65	100	-	140
500	500	451	360	360	127	484	187	588	-	700	F14	175	4x 18	140	Ø45	65	122	-	175
600	600	555	415	415	154	580	223	686	-	820	F16	210	4x 22	165	Ø60	90	180	-	275
700	703	605	-	482	165	684	269	-	-	930	F16	210	4x 22	165	Ø72	80	-	-	423
750	750	629	-	489	190	726	280	-	-	970	F16	210	4x 22	165	Ø60	91	-	-	383
800	803	658	-	550	190	781	307	-	-	1060	F25	300	8x 18	254	Ø80	108	-	-	670
900	900	710	-	602	203	877	349	-	-	1160	F30	350	8x 22	298	Ø98	128	-	-	880

Dimensions X and H are without safety!

The customer must define safety distances to secure accurate installation of the valve.

Dimensions

Gearbox

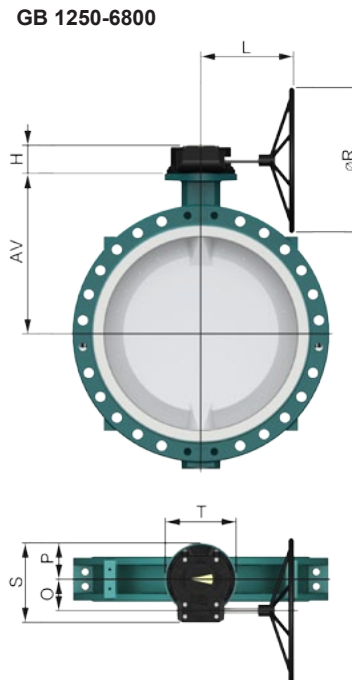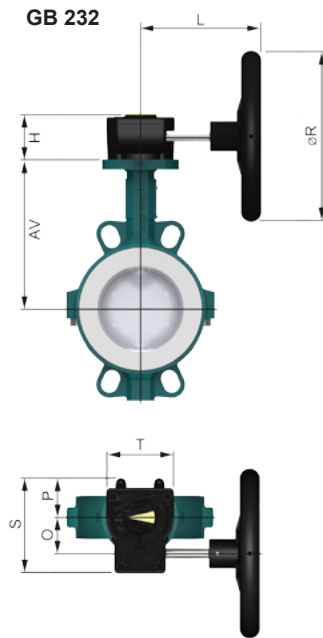

DN		AV	H	L	O	P	R	S	T	n**	[kg]*
32/40	GB232-05.F05-F0711.100	125	53	121	42.5	48	100	114	80	10	0.8
50	GB232-05.F05-F0711.100	134	53	121	42.5	48	100	114	80	10	0.8
65	GB232-05.F05-F0711.100	145	53	121	42.5	48	100	114	80	10	0.8
80	GB232-05.F05-F0711.100	160	53	121	42.5	48	100	114	80	10	0.8
100	GB232-05.F05-F0714.100	175	53	121	42.5	48	100	114	80	10	0.8
125	GB232-05.F05-F0714.100	194	53	121	42.5	48	100	114	80	10	0.8
150	GB232-06.F05-F0717.160	210	59	179	42.5	48	160	114	80	10	0.9
200	GB232-08.F07-F1017.250	239	67	209	50	56	250	131	100	9.25	1.55
250	GB232-08.F07-F1022.250	275	67	209	50	56	250	131	100	9.25	1.55
300	GB232-13.F10-F1222.300	310	84	361	80	83	300	209	175	10	5.4
350	GB232-13.F10-F1227.400	350	84	376	80	83	400	209	175	10	5.4
400	GB232-13.F10-F1227.500	380	84	396	80	83	500	209	175	10	5.4
450	GB232-14.F1445.500	426	84	396	80	83	500	209	175	10	5.4
500	GB232-14.F1445.600	451	84	396	80	83	600	209	175	10	5.4
600	GB1250N.F1660.500	555	100	346	105	110	500	258	220	13.75	22
700	GB1950N.F1672.600	605	126	387	130	142	600	322	285	13	32
750	GB1250N.F1660.700	630	100	346	105	110	500	258	220	13.75	22
800	GB1950N/HR.F2580.600	658	126	387	130	142	600	322	285	21	32
900	GB6800NSP4.F3098.400	710	160	500	263	170	400	482	370	79.25	70


Material: GB 232 Aluminium, Polyurethane coated
GB1250-GB6800 GG 25 Polyurethane coated

* [kg] weight without butterfly valve

** n = Handwheel turns ON/OFF

Dimensions

Handlever

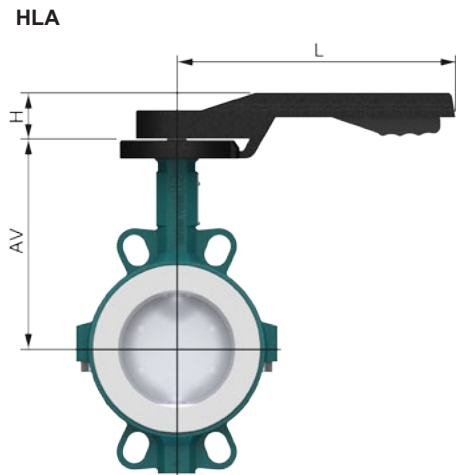

HLA : Aluminum Epoxy coated

DN		AV	H	L	[kg]*
32/40	HLA.F0511.180	125	41	180	0.4
50	HLA.F0511.240	134	43	243	0.5
65	HLA.F0511.240	145	43	243	0.5
80	HLA.F0511.240	160	43	243	0.5
100	HLA.F0714.340	175	43	340	0.6
125	HLA.F0714.340	194	43	340	0.6
150	HLA.F0717.340	210	51	340	0.6

* [kg] weight without butterfly valve

Further documentation

Pneumatic actuators, Electric actuators, Accessories according separate data sheets.
Installation guide, Maintenance guide, Flanges: Please consult these guides for the installation and maintenance of our butterfly valves.

InterApp AG
Grundstrasse 24
CH-6343 Rotkreuz
Phone +41 (0) 41 7982233
Fax +41 (0) 41 7982234
info@ch.interapp.net

InterApp Austria
Kolpingstrasse 19
A-1230 Wien
Phone +43 (0) 1 6162371-0
Fax +43 (0) 1 6162371-99
info@at.interapp.net

InterApp Italy
Via Gramsci 29
I-20016 Pero (MI)
Phone +39 02 339371
Fax +39 02 33937200
info@it.interapp.net

AVK Mittelmann Armaturen
InterApp Germany
Schillerstrasse 50
D-42489 Wülfrath
Phone +49 (0) 2058 901 01
Fax +49 (0) 2058 901 110
info@avkmittelmann.com

AVK Válvulas S.A.
InterApp Válvulas S.A.
Poligono Industrial Francoli, parcela 27
E-46006 Tarragona
Phone +34 977 543 008
Fax +34 977 541 622
avk@avkvalvulas.com