


# WVSK-70-3-K3

REGULATION TYPE

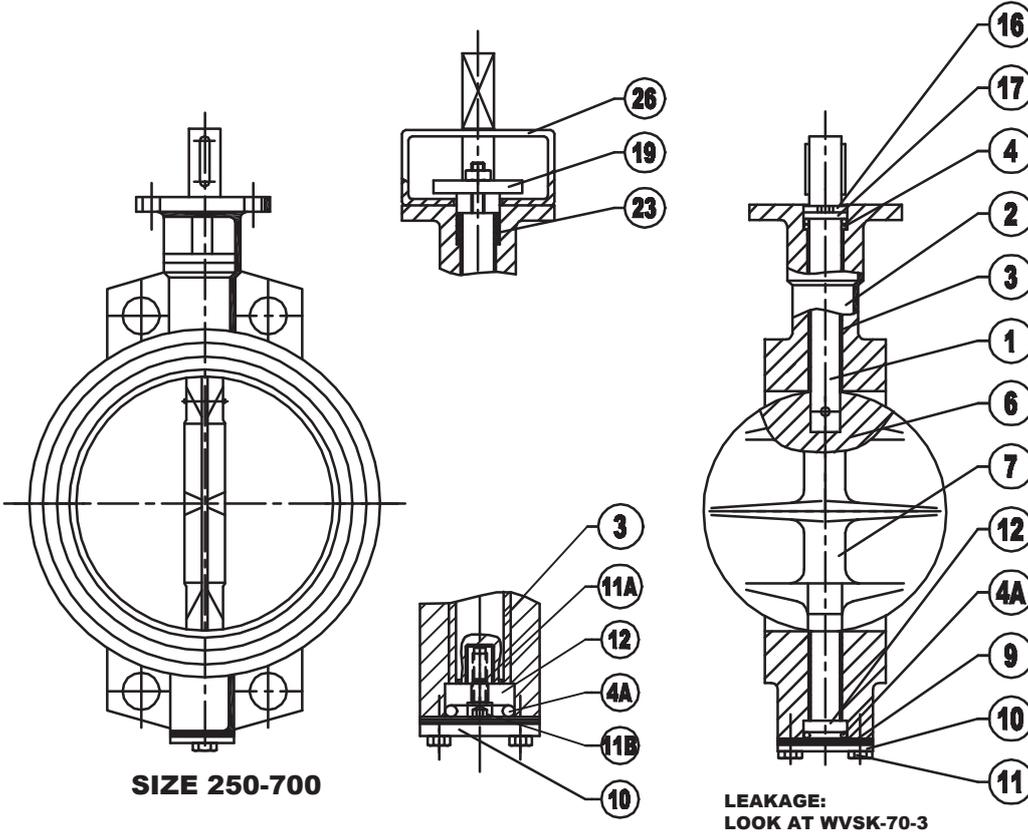

1	AS	SHAFT	SPINDEL	HUSILLO
2	AFSLUITERHUIS	BODY	GEHÄUSE	CAJA
3	LAGERBUS	BEARING	LAGERBUCHSE	COJINETTE
4	O-RING	O-RING	O-RING	ANILLO-O
4A	O-RING	O-RING	O-RING	ANILLO-O
6	PEN	PIN	STIFT	CLAVIJA
7	KLEP	DISC	KLAPPENSCHIEBE	VALVULA
8	AS	SHAFT	SPINDEL	HUSILLO
9	PAKKING	PACKING	PACKUNG	EMPAQUETADURA
10	ACHTERPLAAT	COVER PLATE	LAGERDECKEL	TAPA
11	BOUT	BOLT	SCHRAUBE	PERNO
11A	BOUT	BOLT	SCHRAUBE	PERNO
11B	BOUT	BOLT	SCHRAUBE	PERNO
12	DRUKLAGER	THRUST BEARING	DRUCKLAGER	COJINETTE
16	BORGRING	LOCK WASHER	SICHERUNGSRING	ANILLO DE SOJECION
17	RING	RING	RING	ILAVE
19	PAKKINGDRUKKER	GLAND	STOPFBUCHSENBRILLE	CASQUILLO PRESAETOPA
23	PAKKING	PACKING	PACKUNG	EMPAQUETADURA
26	BRUGSTUK	BRACKET	ZWISCHENSTÜCK	PIEZA INTERMEDIA

FLANGE CONNECTION	
DIN-PN 10/16/25	
ANSI-CLASS 125/150/300	
JIS-10/16/25	
JIS-16K	
WHEN REQUESTED	


FIGURE: MATERIAL COMBINATION				
TYPE	B	C	D	X
BODY	STANDARD DUCTILE IRON GGG-40			
DISC	AL.BRONZE	AISI-316	AL.BRONZE	GGG-40
SHAFT	AISI-316	AISI-316	AL.BRONZE	AISI-304
PINS	STANDARD DUPLEX			

WHEN REQUESTED				
BODY	B-AL.BRONZE	A-AISI-304 C-AISI-316	S-RST-37/2 G-GS-C25	K-SILUMIN
BODY/DISC	SPECIAL MATERIALS UP TO + 1000 °C			
DISC	J-DUPLEX	H-HASTELLOY		
SHAFT AND PACKING	R-GRAFOIL	T-PTFE		
SHAFT AND PINS	M-MONEL K-500	H-HASTELLOY	J-DUPLEX	
TOPFLANGE ACC. ISO-5211				

FACE TO FACE DIMENSIONS ACCORDING INTERNATIONAL STANDARDS

# WVSK-70-3-K3

REGULATION TYPE

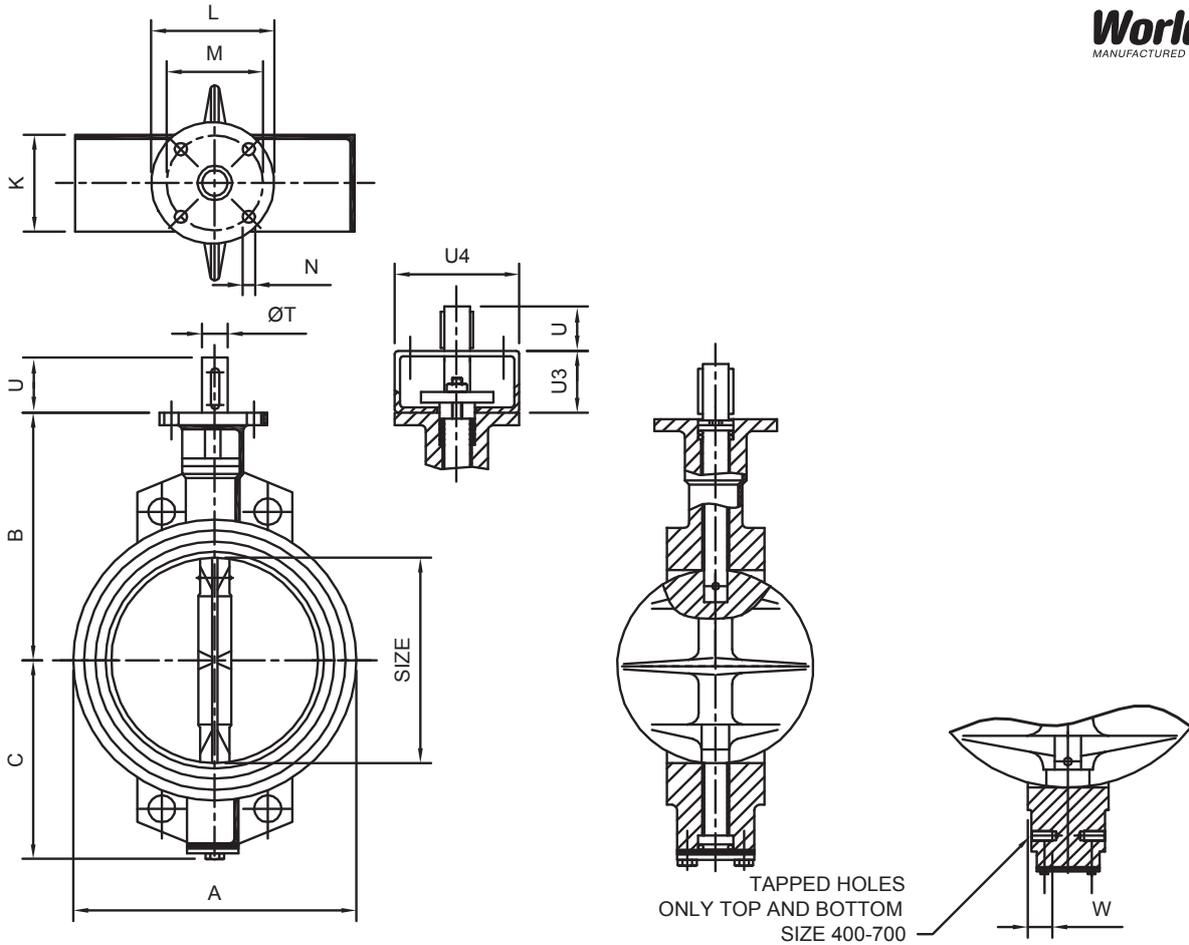

## DIMENSIONS

SIZE mm	SIZE inch	A	B	C	K	L	M	N	T	U	U3	U4	TAPPED HOLES W	Kg
250	10	324	285	240	114	190	135	14	35	50	100	200	-	57
300	12	376	305	260	114	190	135	14	40	60	100	200	-	78
350	14	423	345	290	127	190	135	14	40	60	100	200	-	106
400	16	470	380	325	140	190	135	14	50	60	100	200	30	151
450	18	530	400	345	152	190	135	14	50	60	100	200	30	171
500	20	582	455	380	152	190	135	14	55	70	100	200	30	220
600	24	690	525	445	178	210	165	22	70	85	200	300	30	335
700	28	794	576	490	229	300	165	22	80	85	200	300	30	475

K = FACE TO FACE ACC. DIN-3202-K3 (ISO-SERIES 16) (BS-LONG)

## PRESSURE TABLE

STANDARD DELIVERY
SIZE mm
250-700

BODY TEST 1.5 X PN

FACE TO FACE DIMENSIONS ACCORDING INTERNATIONAL STANDARDS